















DirectTex[®] Artist Mambo[®] Antibac

Fields of application

.02 .04 .05 .07

Specifications

	REF. 564160 184
	100 % polyester weave fabrics PVC-free, recyclable
	ca. 160/ 252/ 320/ 505 cm ca. 63/ 99/ 126/ 199 inch other widths available on request
	B-s1, d0 DIN EN 13501-1
	ca. 170 g/m ² ca. 5.0 oz/yd ²
	ca. 0.25 mm ca. 250 µm
	rolls 50/ 100 m 55/ 109 yd
	coated side: 7 uncoated side: 6-7 DIN EN ISO 105-B02
	warp: 1314.1 N weft: 1238.6 N DIN EN ISO 13934-1
	warp: 27.9 % weft: 32.6 % DIN EN ISO 13934-1
	warp: 0.8 % weft: 1.6 % DIN EN 14704-1
	indirect, direct light
	cold, heat, ultrasonic cut
	bacteriostatic activity reduction:>99,99% EN ISO 20743: 2013

Printing methods

print	UV	Latex	Dyesub
Inside	•		
Outside			•

Article shrinkage (50 sec hold up time)

	shrinkage in cross direction	shrinkage in longitudinal direction	recommended fixing temperature
180°C	0,7 %	1,5 %	•
190°C	0,8 %	1,8 %	
200°C	1,2 %	2,7 %	
210°C	1,3 %	2,8 %	


Certifications



DirectTex® Artist Mambo® Antibac

Fields of application

.02 .04 .05 .07

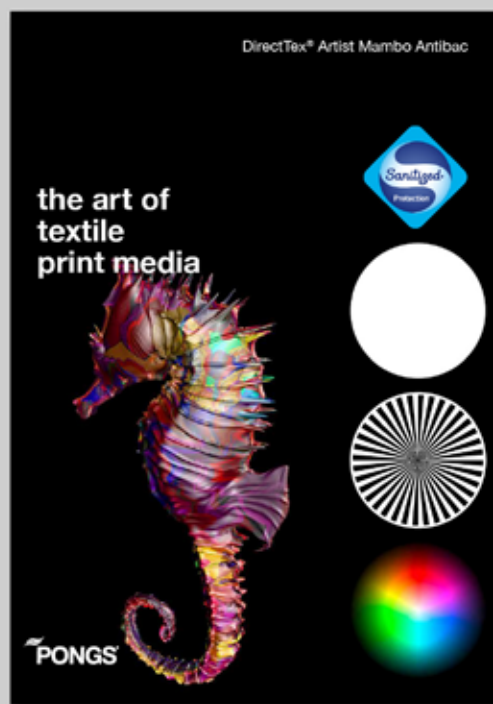

Ref.-Nr.: 564160 184 | Preview print sample