

## DESCOR® PREMIUM Colour

Fields of application

**.01 .03 .05 .12**

### Specifications



599142



100 % polyester  
knit fabrics  
PVC-free, recyclable



ca. 310/ 505 cm  
ca. 122/ 199 inch



B-s1, d0    DIN EN 13501-1



ca. 255 g/m<sup>2</sup> - 295 g/m<sup>2</sup>  
ca. 7.5 oz/yd<sup>2</sup> - 8.7 oz/yd<sup>2</sup>



rolls  
50 m  
55 yd



ca. 310 - 360 µm



maximum tensile strength  
warp: 462 N    weft: 627 N  
DIN EN ISO 13934-1



maximum tensile elongation  
warp: 31.5 N    weft: 54.5 N  
DIN EN ISO 13934-1



trapezoid tear resistance  
warp: 54.2 N    weft: 81.3 N  
DIN EN 1875-3



cold, heat, ultrasonic cut

### Certifications




Please note, there may be slight variations in technical details for other DESCOR® colours.

## DESCOR® PREMIUM Colour

Fields of application

.01 .03 .05 .12

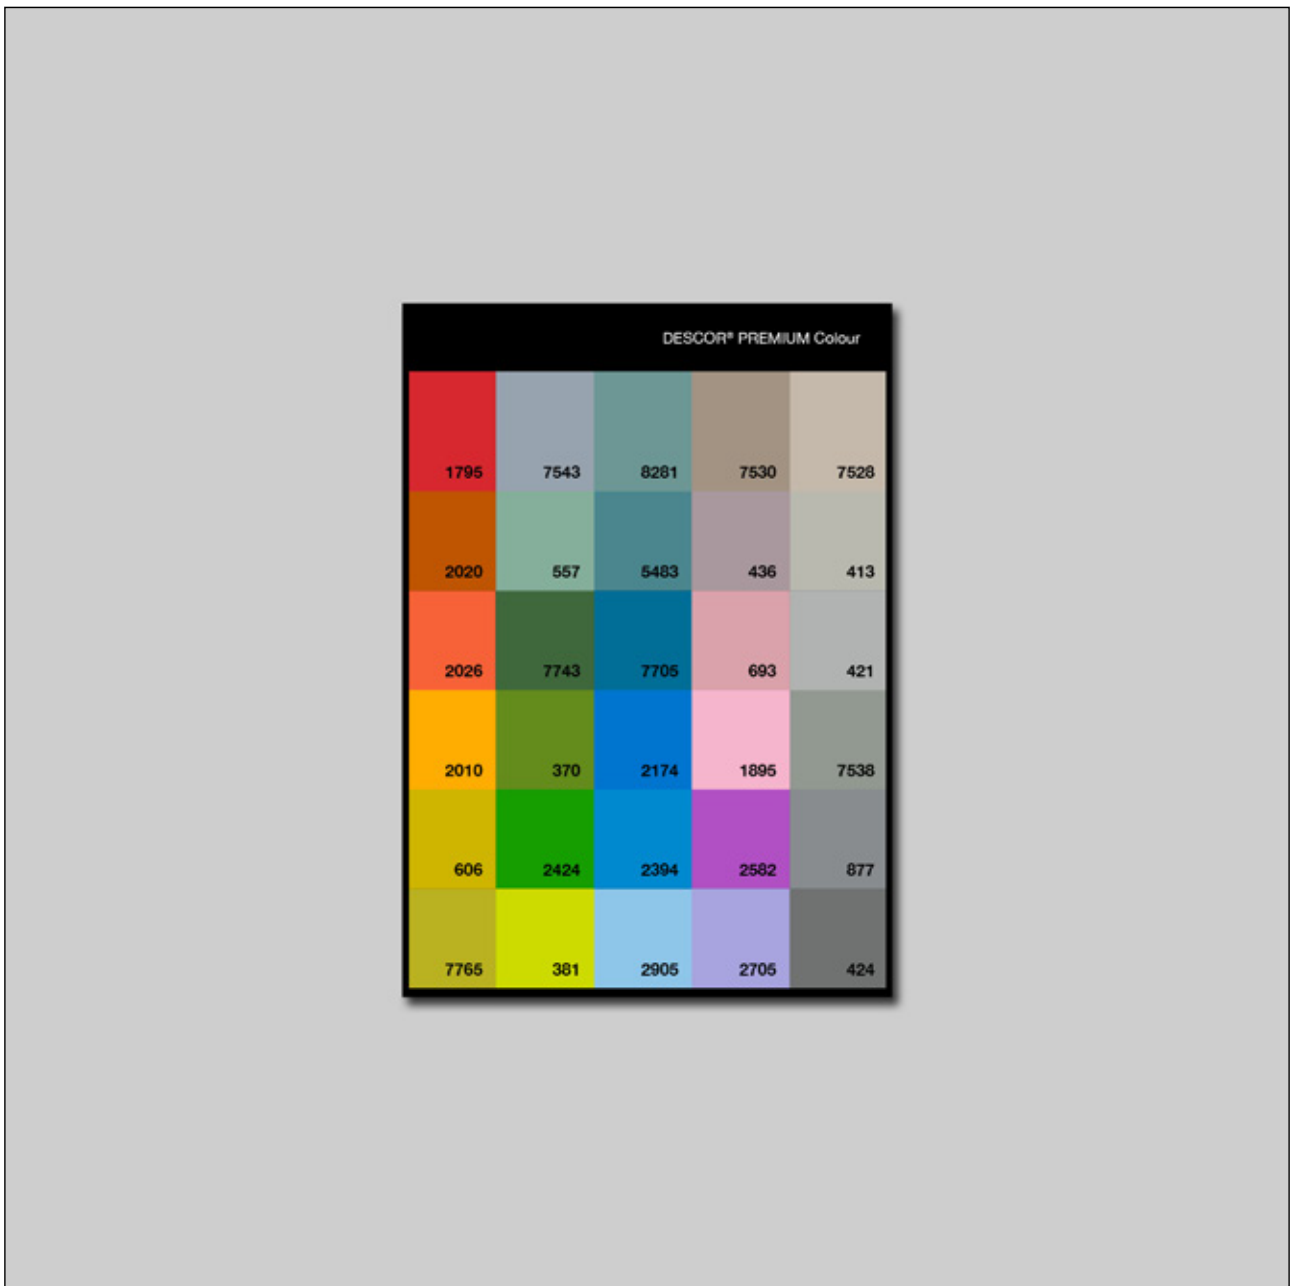

Ref.-Nr.: 599142 | Preview print sample