














# PrintTex® Artist Light®

Field of application

## Display/ Banner

### Specifications

-  **REF.** 561161 042
-  100 % polyester  
weave fabrics  
PVC-free, recyclable
-  ca. 155/ 252/ 310/ 505 cm  
ca. 61/ 99/ 122/ 199 inch  
other widths available on request
-  B-s1, d0    DIN EN 13501-1
-  ca. 185 g/m<sup>2</sup>  
ca. 5.5 oz/yd<sup>2</sup>
-  ca. 0.30 mm  
ca. 300 µm
-  rolls  
50/ 100 m  
55/ 109 yd
-  warp: 1521 N  
weft: 1375 N  
DIN EN ISO 13934-1
-  warp: 76 N  
weft: 77 N  
DIN EN ISO 13937-2
-  **Light**  
blank: 34.7 %  
DIN EN 410
-  blank: 6  
DIN EN ISO 105-B02
-  cold, heat, ultrasonic cut
-  total footprint: 0,320 kg CO<sub>2</sub> eq./m<sup>2</sup>  
determination accuracy: 85%

### Printing methods

print	UV	Latex	Dyesub
Inside	•	•	
Outside			


### Certifications



## PrintTex® Artist Light®

Field of application

**Display/ Banner**

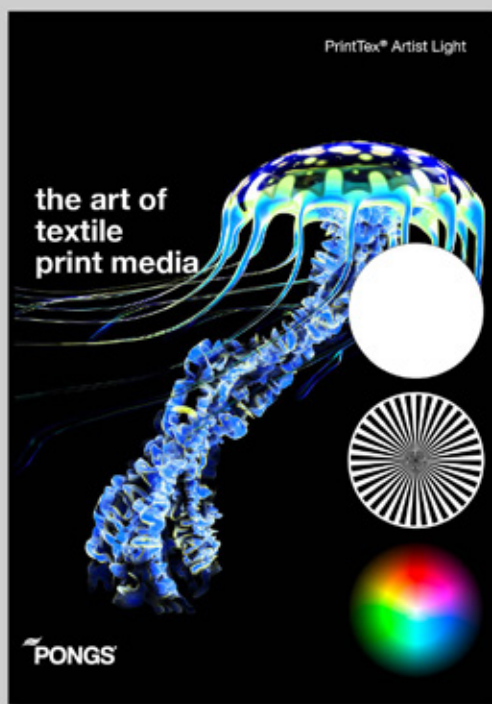

Ref.-Nr.: 561161 042 | Preview print sample