

PrintTex®

CO Gitter VdS

Field of application

Scrim

Specifications



191070 004



41% virgin cotton
58% recycled pre-consumer cotton
1 % recycled pre-consumer mixed fibers



weave fabrics, PVC-free
grid dimension 4 x 4 mm



ca. 320/ 520 cm
ca. 126/ 205 inch
other widths available on request



B-s3,d0 EN 13501-1



ca. 90 g/m²
ca. 2.7 oz/yd²



ca. 0.72 mm
ca. 720 µm



rolls
50 m
55 yd



100 Pa: > 3000 l/(m²s)
200 Pa: > 3000 l/(m²s)
DIN EN ISO 9237



sprinkler compatible
crease-resistant



cold cut



total footprint: 0,730 kg CO₂ eq./m²
determination accuracy: 86%



warp: 28.2 N
weft: 38.5 N
DIN EN ISO 9073-4



all colours: 6
DIN EN ISO 105-B02

Printing methods

print	UV	Latex	Dyesub
Inside	•		
Outside	•		


Certifications



PrintTex[®]
CO Gitter VdS

Field of application

Scrim

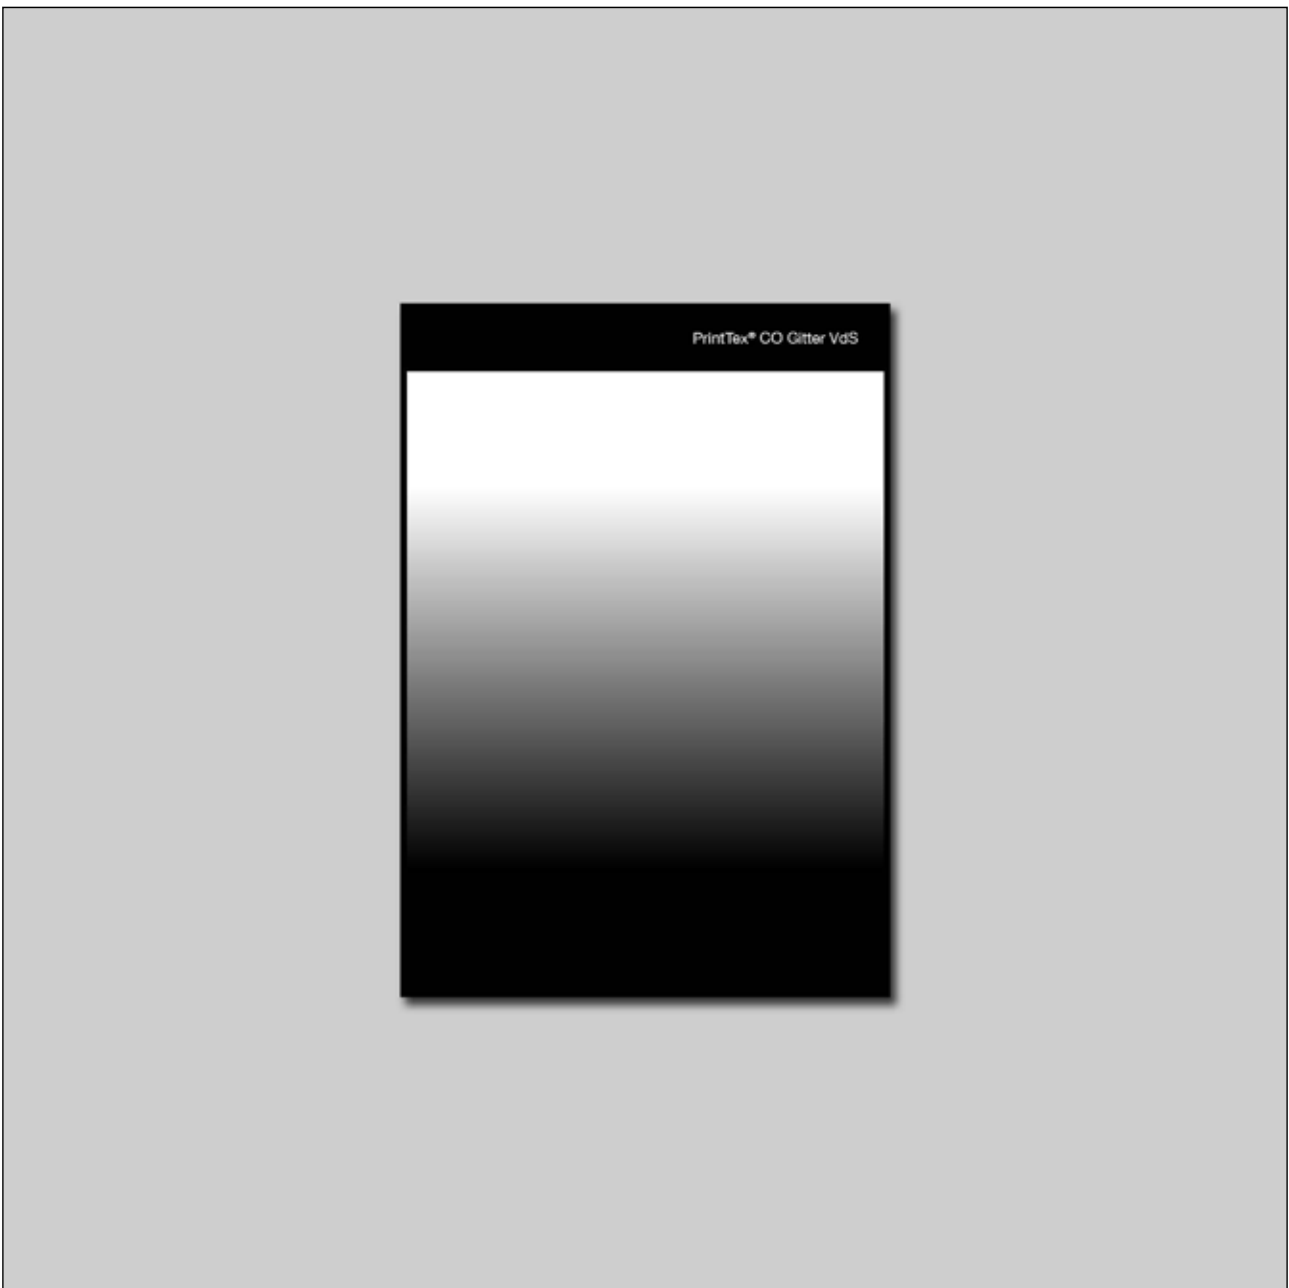

Ref.-Nr.: 191070 004 | Preview print sample