

# PrintTex®

## Softimage Lightbox

Field of application

**Backlit**

Specifications



599180 173



100 % polyester  
knit fabrics  
PVC-free



ca. 155/ 252/ 310/ 505 cm  
ca. 61/ 99/ 122/ 199 inch  
other widths available on request



B-s1, d0    DIN EN 13501-1  
Class A    ASTM E84-16



ca. 205 g/m<sup>2</sup>  
ca. 6.1 oz/yd<sup>2</sup>



ca. 0.36 mm  
ca. 360 µm



rolls  
50/ 100 m  
55/ 109 yd



blank: 5  
DIN EN ISO 105-B02



blank: 35.7 %  
DIN EN 410



blank: 93.7  
DIN 5033-1



length: 2.2 %  
cross: 0.9 %  
DIN EN 14704-1



indirect, direct light



cold, ultrasonic cut



length: 290.7 N  
cross: 1119.3 N  
DIN EN ISO 13934-1 - max. tensile strength



length: 65.4 %  
cross: 34.0 %  
DIN EN ISO 13934-1 - max. tensile elongation



length: 26.1 N  
cross: 13.7 N  
DIN EN ISO 13937-2 - trouser tear propagation



total footprint: 0,980 kg CO<sub>2</sub>/m<sup>2</sup>  
determination accuracy: 85%

Printing methods

print	UV	Latex	Dyesub
Inside	•	•	
Outside			


Certifications



## PrintTex® Softimage Lightbox

Field of application

**Backlit**

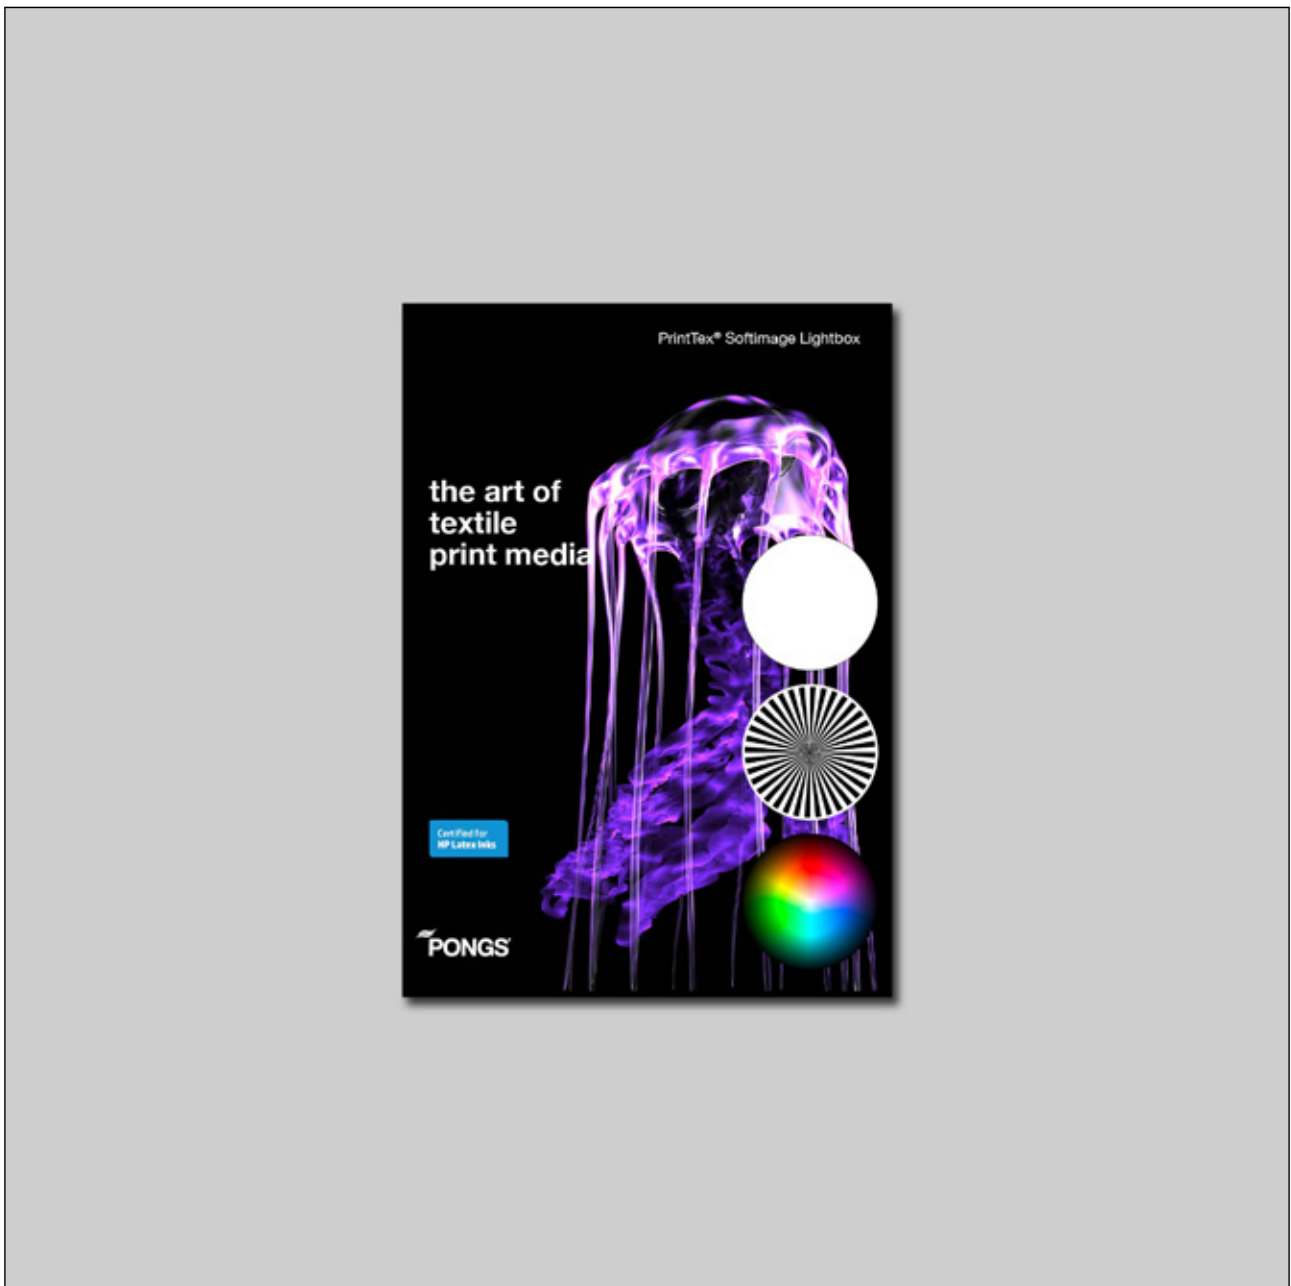

Ref.-Nr.: 599180 173 | Preview print sample