










# DirectTex® Artist Heavy®

Field of application

## Display/ Banner

### Specifications

	REF. 564250 088
	100 % polyester weave fabrics PVC-free, recyclable
	ca. 103/ 155/ 252/ 310/ 505 cm ca. 41/ 61/ 99/ 122/ 199 inch other widths available on request
	B-s1, d0    DIN EN 13501-1
	ca. 255 g/m <sup>2</sup> ca. 7.5 oz/yd <sup>2</sup>
	ca. 0.38 mm ca. 380 µm
	rolls 50 m 55 yd
	blank:    31.8 % DIN EN 410
	cold, heat, ultrasonic cut

### Printing methods

print	UV	Latex	Dyesub
Inside	•	•	•
Outside			

### Article shrinkage (50 sec hold up time)

	shrinkage in cross direction	shrinkage in longitudinal direction	recommended fixing temperature
180°C	0,8 %	0,8 %	
190°C	0,8 %	0,9 %	•
200°C	1,7 %	1,6 %	
210°C	1,9 %	2,4 %	


### Certifications



## DirectTex® Artist Heavy®

Fields of application

**.02 .04 .05 .07**

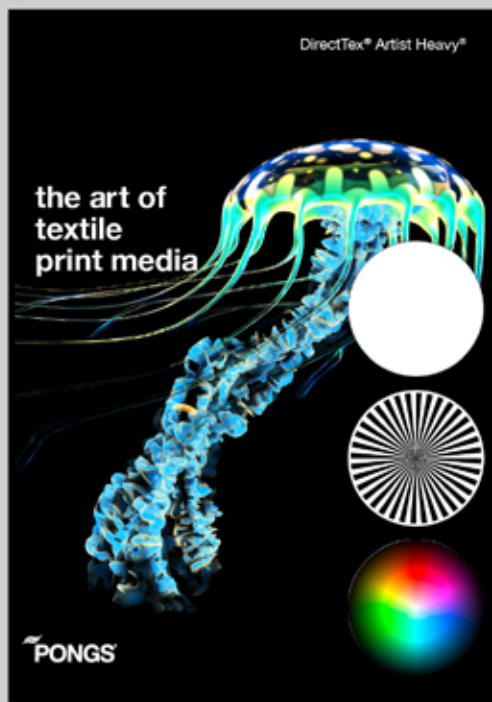

Ref.-Nr.: 564250 088 | Preview print sample