

DESCOR® PREMIUM Acoustic

Field of application

Acoustic

Specifications



699144 085
*699144 347 086



100 % Trevira CS
knit fabrics
PVC-free, recyclable



ca. 320/ 420/ 520cm cm
ca. 122/ 165/ 205 inch
other widths available on request



B-s1, d0 DIN EN 13501-1 (only white)
Class A ASTM E84-16 (only white)
* M1 NF P 92 503- 507 (only black)



ca. 195 g/m² | *ca. 195 g/m²
ca. 5.6 oz/yd² | *ca. 5.5 oz/yd²



rolls
50 m
55 yd



blank: 7
DIN EN ISO 105-B02 (only white)



ca. 0,39 mm | *ca. 0,38 mm
ca. 390 µm | *ca. 380 µm



cold, heat, ultrasonic cut



with micro-perforation
air permeable

Printing methods


print	UV	Latex	Dyesub
Inside	•		
Outside			

Certifications (only white)



Acoustic absorption value α_w /class*: 0.90/ A

Type of assembly E-50 according to DIN EN ISO 354.
Textile in front of total 50 mm, included
40 mm ISOVER SSP 2 and 10 mm airspace.

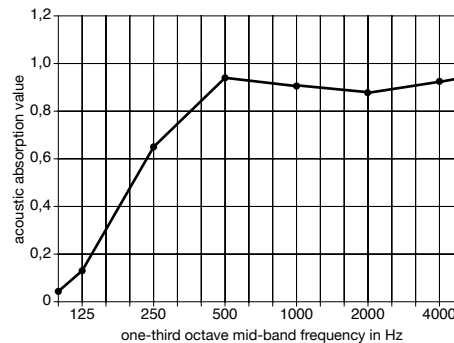

Noise Reduction Coefficient (NRC) according to
ASTM C423, Type G-75: 0.45

* DESCOR® PREMIUM Acoustic black

Please note, there may be slight variations in technical details for other DESCOR® colours.

DESCOR[®]
PREMIUM Acoustic

Field of application

Acoustic



Ref.-Nr.: 699144 085 | Preview print sample